

1x4 HDMI Distribution Amplifier

Operation Manual

CHDMI-14C



Introduction

The **CHDMI-14C** is a high performance HDMI distribution amplifier, Full HD 1080P supported with 25m output range.


It allows one HDMI source to connect up to 4 HDMI displays simultaneously.

Features

1. Built-in EDID simulator and HDCP keyset allows each output to work independently in connecting to a HDMI display.
2. Splits a HDMI source up to 4 outputs without signal loss.
3. Compliant with HDMI 1.2, HDCP 1.1 and DVI 1.0 specifications.
4. Supports a wide range of PC and HDTV resolutions from VGA to UXGA and 480p to 1080p. Maximum resolution bandwidth is 165MHz.
5. Provides multi-channel I²S digital audio output, with sampling rate up to 192KHz.
6. Supports both compressed and uncompressed multi-channel audio.

Operation Controls and Functions


Front Panel

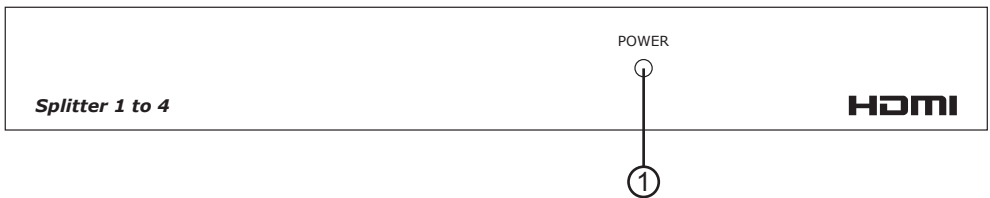

1. Power LED indicator:

The LED will illuminate when the power is connected.

Rear Panel

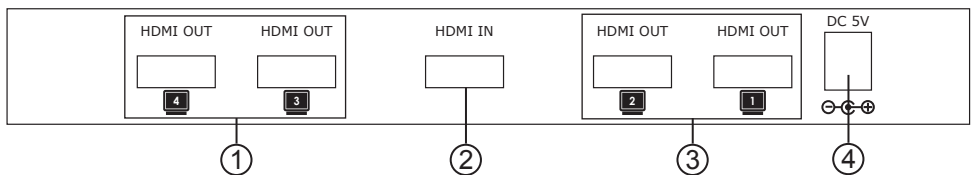

1. HDMI outputs 3 & 4:

Connect each of the output ports to the HDMI input of a HDMI display.

2. HDMI input:

Connect to the HDMI or DVI output of your source equipment such as DVD player or set-top-box.

3. HDMI outputs 1 & 2:

Connect each of these output ports to the HDMI input of a HDMI display.

4. Power:

Plug the 5V DC power supply into the CHDMI-14C and connect the adaptor to AC wall outlet.

Specifications

- * Frequency Bandwidth: 1.65Gbps(single link)
- * Input/Output:1-in/4-out HDMI female ports
- * 5VDC power supply
- * Operating Temperature Range: 0°C ~ 40°C
- * Dimensions (mm): 200(W) x104(D) x 30(H)
- * Weight (g): 610

Connection and Installation

