

HDMI to HDMI Scaler Box

Operation Manual



TABLE OF CONTENTS

1. Introduction	1
2. Features	1
3. Package Contents	1
4. Operation Controls and Functions	2
4.1 Front Panel.....	2
4.2 Rear Panel.....	3
4.3 OSD Operation.....	4
5. Specifications	5
5.1 General Specification.....	5
5.2 Support Resolution.....	5
6. Connection and Installation	5

1. Introduction

Cypress CP-259H is a compact yet versatile HDMI to HDMI Scaler Box. It accepts HDMI input with a separate Toslink or analog audio and scale it to HDMI output (at a number of selectable resolutions) with additional Toslink and analog audio output.

CP-259H has a comprehensive OSD menu that allows user to select a variety of output resolutions and adjust for best picture quality.

It is ideal for using between incompatible HDMI source and display by changing picture resolution and frame rate of HDMI source to match the native resolution of the HDMI display.

2. Features


1. HDMI 1.2, HDCP 1.1 and DVI 1.0 compliant.
2. Scales any PC (VGA ~ WUXGA) /HD (480i ~ 1080p) resolutions to/from another PC/HD resolutions.
3. Automatically detect the factory setting of the connected display and output the corresponding resolution and refresh rate, when the NATIVE output is selected.
4. Supports 50/60Hz frame rate conversion.
5. Supports 3-D motion video adaptive, 3-D de-interlacing, and 3:2 / 2:2 pull-down detection and recovery.
6. Provides output picture adjustment on contrast, brightness, hue, saturation, sharpness, RGB level, and scan size.
7. Supports high resolution input/output:
PC: VGA, SVGA, XGA, SXGA, UXGA, WXGA, WSXGA, WUXGA
HDTV: 480i, 576i, 480p, 576p, 720p, 1080i, and 1080p
8. Supports digital and analog audio input and output.

3. Package Contents

1. Cypress CP-259H Scaler Box
2. 5VDC Power Supply Adaptor
3. Operation Manual

4. Operation Controls and Functions

4.1. Front Panel

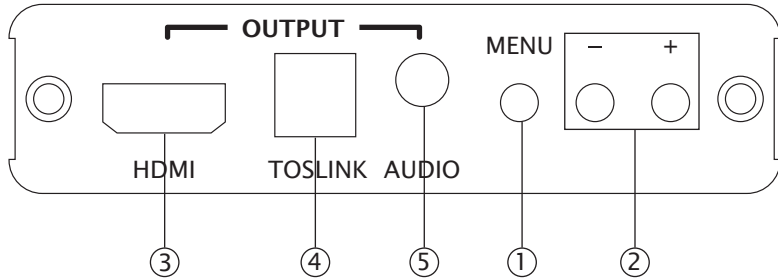

1. MENU Button:

- Press the MENU button to bring up OSD operation menu (see section "4.3 OSD Operation" for reference.)
- When in the OSD menu mode, use MENU button as an OK key to confirm the selection.

2. +/- Buttons:

- On the first tier of OSD menu, use + and - buttons to scroll up/down the highlight bar for selection.
- Once the desired option is selected, use + and - buttons to toggle between setting values.

3. HDMI OUTPUT:

Connect the HDMI output port to the HDMI input port of your display.


4. TOSLINK OUTPUT:

Connect the digital audio output port to the input port of your digital audio equipment such as amplifier, or receiver, using Optical Fiber cable.

5. AUDIO OUTPUT:

Connect the analog audio output port to the input port of your analog audio equipment such as speakers.

4.2. Rear Panel

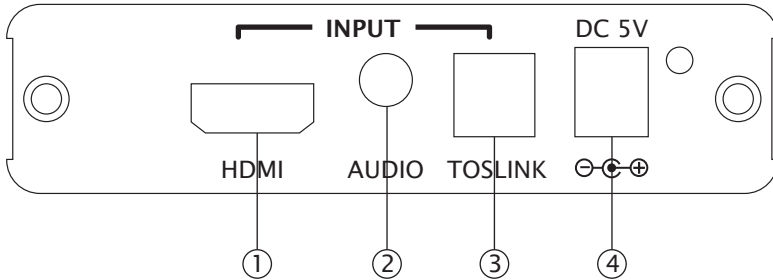

1. HDMI INPUT:

Connect the HDMI input port to the HDMI output port of your source equipment such as DVD player or Set-Top-Box.

2. AUDIO INPUT:

Connect the analog audio input port to the output port of your source equipment such as DVD player or Set-Top-Box.

3. TOSLINK INPUT:

Connect the digital audio input port to the Toslink output port of your source equipment such as DVD player or Set-Top-Box.

4. Power Supply:

Plug the 5VDC power supply into the unit and connect the adaptor to AC wall outlet.

5. Specifications

5.1. General Specification

- * Frequency bandwidth: 1.65Gbps (single link)
- * Input Ports:
HDMI x 1 / Toslink x 1 / 3.5mm Phone Jack x 1
- * Output Ports:
HDMI x 1 / Toslink x 1 / 3.5mm Phone Jack x 1
- * 5V DC power supply
- * Dimensions: 102(W) x 145(D) x 25(H)mm
- * Weight: 3.2Kgs

5.2. Support Resolution

INPUT	
PC	VGA@(60/72/75/85Hz), SVGA@(56/60/72/75/85Hz), XGA@(60/70/75/85Hz), SXGA@(60/75/85Hz), UXGA@60Hz, WXGA@60Hz, WSXGA@60Hz, WUXGA@60Hz
TV	480i, 480p, 576i, 576p, 720p@(50/60Hz), 1080i@(25/30Hz), 1080p@(50/60Hz)
OUTPUT	
PC	VGA@(60/72/75/85Hz), SVGA@(56/60/72/75/85Hz), XGA@(60/70/75/85Hz), SXGA@(60/75/85Hz), UXGA@60Hz, WXGA@60Hz, WSXGA@60Hz, WUXGA@60Hz
TV	480i, 480p, 576i, 576p, 720p@(50/60Hz), 1080i@(25/30Hz), 1080p@(50/60Hz)

6. Connection and Installation



Cypress Scaler Box Series:

Product	INPUT	OUTPUT	Highest Resolution
CP-259H	HDMI	HDMI	1080p
CP-255I	Video/S-Video/ PC/YPbPr/YCbCr/ HDMI	HDMI	1080p
CP-255H	YPbPr/YCbCr/PC/ DVI-D/HDMI	DVI-D HDMI	1080p
CP-255D	YPbPr/YCbCr/PC/ DVI-D	PC DVI-D	1080p
CM-394	Video/S-Video/ SCART	YPbPr/HDTV RGB/PC	1080i
CM-393S	Video/S-Video/ SCART/HDMI	HDMI	1080i
CM-392	Video/S-Video	HDMI	1080i
CM-391	Video/S-Video	DVI	1080i
CM-390	Video/S-Video	YPbPr/HDTV RGB/PC	1080i
CSC-220	YPbPr/YCbCr/PC/ DVI-D	PC DVI-D	1080i
CS-720PHD	SCART	HDMI	720p (fixed)
CV-720PHD	Video/S-Video	HDMI	720p (fixed)
CP-254	DVI	DVI	1080i
CP-253	DVI	YPbPr/HDTV RGB/PC	1080i
CP-252	YPbPr/HDTV RGB/PC	DVI	1080i
CP-251F	YPbPr/HDTV RGB/PC	YPbPr/HDTV RGB/PC	1080i



